

# SQL, SSQL, and GIS Data Architecture

IT4GIS  
Keith T. Weber, GISP  
GIS Director  
ISU-GIS Training and Research Center

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State UNIVERSITY

---

---

---

---

---

---

---

---

## Today's Road Map

- We will be making some connections
- This presentation/discussion focuses on Spatial SQL or SSQL
- In this week's exercise you will revisit some GIS fundamentals
  - Data Structure (vector and raster)
  - Objects in a Geodatabase
  - Topology

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State UNIVERSITY

---

---

---

---

---

---

---

---

## Definitions to get started

- SQL = Structured Query Language
- SSQL = Spatial SQL
- GPL = Graphical Presentation Language

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State UNIVERSITY

---

---

---

---

---

---

---

---

## SQL- A Review

- SQL is a simple language used to query (question) an ODBC-compliant database and retrieve data.
  - SQL is *not* simple or standard
  - S = structured

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

---

## Structure

- The most basic SQL statement is:
  - **SELECT** \* from *database.table*
- Let's dissect this statement
  - **SELECT** is the command
  - \* is a wildcard = i.e., everything and anything
  - Database.table is the target of the query

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

---

## A Little More...

- The previous SQL statement selected everything from a table
- But, how do we select only a portion of a table?
  - The **WHERE** CLAUSE

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

---

## WHERE CLAUSE



- **WHERE** conditional operator
- For example:  
– **SELECT** \* from database.table **WHERE**  
CITY\_NAME = 'Pocatello'



Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

---

## Types of Conditional Ops

- **Simple** (as in the previous example)
- **Compound**
  - Let's say we want to select and work with all records describing *Pocatello* and *Blackfoot*
- We could select and work with them individually using two discrete **Simple** statements or use **Conditional** operators in a **Compound Expression**

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

---

## Combining Statements using Conditional Operator Expressions

- Instead of:  
– **SELECT** \* from database.table **WHERE**  
CITY\_NAME = 'Pocatello'  
– ...do some work, and then  
– **SELECT** \* from database.table **WHERE**  
CITY\_NAME = 'Blackfoot'  
– ...do some more work

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

---

## We Can Use...

- A **Compound** expression combining two or more simple expressions using either:
  - AND
  - OR
- In our example, which shall we use?

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

---

## OR

- **SELECT** \* from database.table **WHERE**  
CITY\_NAME = 'Pocatello'  
**OR**  
CITY\_NAME = 'Blackfoot'

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

---

## Why OR?

- Before a record (entity) is returned as a result of a query, the record must satisfy EACH **WHERE** clause if **AND** is used.
- When **OR** is used, a record must satisfy only one of the **WHERE** clauses.

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

---

## This is SQL

- What is **SSQL**?
  - **Spatial** Structured Query Language
  - Or SQL for Spatially-enabled relational databases (i.e., object-relational databases)
    - Informix
    - Oracle
    - IBM DB2
    - MS SQL Server
    - PostgreSQL
    - SQLite (GeoPackage)

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

---

## An Example

- **SELECT** *residence.geometry*  
FROM residence  
**WHERE** Type = 'single family'

What is different about this expression?  
*residence.geometry*

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

---

## Why is *\*.geometry* important?

- Until now, we have been returning all fields
  - (SELECT \* FROM...)
- \*.geometry returns the *geographic feature(s)* as objects
- SSQL is used to select the geometry (*.geometry*) of the TABLE of interest (residence) from a spatially-enabled object-relational database

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---


---

---

## GIS Layers are Tables?

OBJECTID	SHAPE	NAME	TYPE	VALUE
1	[SHAPE]	POCATELLO	City	POCATELLO
2	[SHAPE]	IDAHO FALLS	City	IDAHO FALLS
3	[SHAPE]	MERIDIAN	City	MERIDIAN
4	[SHAPE]	TWIN FALLS	City	TWIN FALLS

## Object Relational

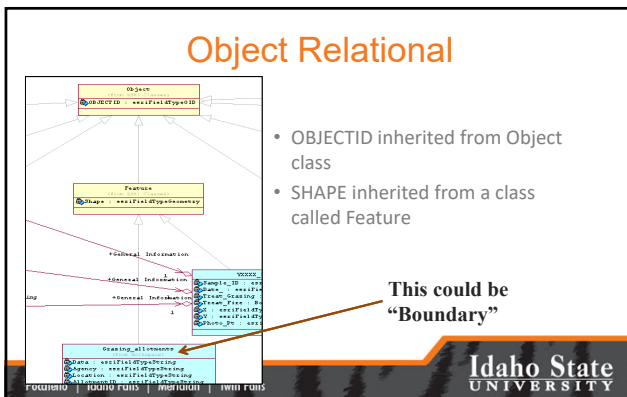

- OBJECTID inherited from Object class
- SHAPE inherited from a class called Feature

This could be "Boundary"

## Geometry Data Type

- We have talked a lot about the data types used to store traditional attributes (e.g., long integer, text, etc.)
- Recall, an ORDBMS can store OBJECTS natively
- What data type is used to store OBJECTS?

## Speaking of Geometry

- GIS data is all about geometry
  - Vector data is based on Cartesian Coordinates (named for René Descartes)
  - However, GIS is not Geometric Information Systems, but Geographic
  - Vector data are points, lines, and polygons

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---


---

---

---

## Points, Lines, and Polygons

- Understanding the fundamentals of data architecture is critical to being an effective GIS Analyst

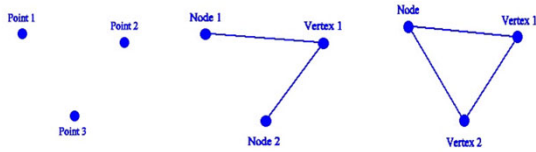

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

## How Are These Different?

- Besides the names used to describe these (points, lines, polygons, node, vertex), how does point layer **fundamentally** differ from a polygon layer?
  - Think about topology
  - Think about code/instruction to draw these geometries

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

## Raster Data (AKA, imagery)

- Based on picture (**pix**) elements (pixels)
  - All pixels (cells) have the exact same dimension (X Y)
- Each pixel is discrete and identified by a single numeric value (no text)
- Raster data can be:
  - Boolean (true (1), false (0))
  - Categorical (1 = water, 2 = grassland, 3 = forest)
  - Continuous (e.g., satellite imagery, elevation data)
- All raster layers are rectangular in shape

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---


---

---

---

## No Topology

- We can see patches of pixels in the same land cover class
- GIS (the computer software) “sees” individual pixels

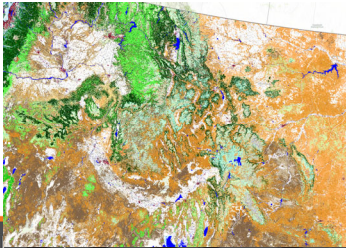

Pocatello | Idaho Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

---

## NoData Pixels

- Mathematically, **NoData** values are important to understand

$$\begin{array}{|c|c|c|} \hline 1 & 0 & 1 \\ \hline 0 & 1 & 1 \\ \hline 0 & 0 & 1 \\ \hline \end{array} * \begin{array}{|c|c|c|} \hline \text{ND} & \text{ND} & 1 \\ \hline 1 & 1 & 1 \\ \hline \text{ND} & 1 & 1 \\ \hline \end{array} = \begin{array}{|c|c|c|} \hline \text{ND} & & \\ \hline & & \\ \hline & & \\ \hline \end{array}$$

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

---

## Any Image Can Be Georectified

- How?
- Create a **World File**
  - TFW = TIFF World File
- Raster layers are drawn beginning in the upper left corner of the image

```
10.0000000000
0.0000000000
0.0000000000
-10.0000000000
-2354936.2630753890
3165585.7730424833
```

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

---



## Key Concepts

- SQL is highly structured
- **Spatial SQL** builds upon SQL but remains within the same general framework
- SSQL requires an object relational, spatially-enabled database
- The \*.geometry field is queried to return features...
  - Objects are stored in the table as LOB data (along with other attributes)
- Data architecture is important!

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

---

## Professional Hints and Tips

- Work Smarter not Harder
  - Open DIR.txt in Excel and extract a list of file names

Pocatello | Idaho Falls | Meridian | Twin Falls

Idaho State  
UNIVERSITY

---

---

---

---

---

---

---

---

Questions?



Pocatello | Idaho Falls | Meridian | Twin Falls

**Idaho State**  
UNIVERSITY

---

---

---

---

---

---

---